

05/23/00
15580 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	PP16US
	First Inventor or Application Identifier	Simon Robert Walmsley
	Title	METHOD AND APPARATUS OF DITHERING
	Express Mail Label No.	


APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages 20] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the invention- Brief Summary of the invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 11]	ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement of Power of Attorney (when there is an assignee) <input type="checkbox"/> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input checked="" type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:	
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).		
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).		

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 24011
(Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

Name	Kia Silverbrook				
	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	Zip Code	2041
Country	AUSTRALIA	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

Name (Print/Type)	Kia Silverbrook	Registration No. (Attorney/Agent)	
Signature		Date	May 16, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
PP16US

Applicant, Patentee, or Identifier: Silverbrook Research Pty Ltd
Application or Patent No.: _____
Filed or Issued: May, 2000
Title: METHOD AND APPARATUS OF DITHERING

I hereby state that I am
☒ the owner of the small business concern identified below:
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Silverbrook Research Pty. Ltd.

ADDRESS OF SMALL BUSINESS CONCERN 393 Darling Street, Balmain, NSW 2041, Australia

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:
☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Kia Silverbrook

TITLE OF PERSON IF OTHER THAN OWNER _____

ADDRESS OF PERSON SIGNING 393 Darling Street, Balmain, NSW 2041, Australia

SIGNATURE  DATE May 16, 2000

METHOD AND APPARATUS FOR DITHERING

FIELD OF THE INVENTION

5 The invention relates to a compact printer system able to print full-color, business card size documents from a device about the size of a pen. The system includes various hot-connectable modules that provide a range of functions. In particular the invention relates to a method of, and apparatus for, dithering an image to be printed.

10 Reference may be had to co-pending applications claiming priority from Australian Provisional Patent Application number PQ0560 dated 25 May 1999. The co-pending applications describe related modules and methods for implementing the compact printer system. The co-pending applications are as follows:

USSN	Our Docket Number	Our Title
TBA	PP01	Compact Color Printer Module
TBA	PP02	Modular Compact Printer System
TBA	PP03	Nozzle Capping Mechanism
TBA	PP04	Ink Cartridge for Compact Printer System
TBA	PP07	Controller for Printer Module
TBA	PP08	Camera Module for Compact Printer System
TBA	PP09	Image Processor for Camera Module
TBA	PP10	Memory Module for Compact Printer System
TBA	PP11	Effects Module for Compact Printer System
TBA	PP12	Effects Processor for Effects Module
TBA	PP13	Timer Module for Compact Printer System
TBA	PP15	Color Conversion Method for Compact Printer System
TBA	PP17	Method and Apparatus of Image Conversion

BACKGROUND OF THE INVENTION

15 Microelectronic manufacturing techniques have led to the miniaturization of numerous devices. Mobile phones, personal digital assistant devices, and digital cameras are very common examples of the miniaturization trend.

One device that has not seen the advantage of microelectronic manufacturing techniques is the printer. Commercially available printers are large compared to many

of the devices they could support. For instance, it is impractical to carry a color printer for the purpose of instantly printing photographs taken with known compact digital cameras.

A compact printhead has been described in co-pending United States Patent Applications filed simultaneously to the present application and hereby incorporated by cross reference:

USSN	Our Docket Number	Our Title
TBA	MJ62	Fluidic seal for an ink jet nozzle assembly
TBA	IJ52	Ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	IJM52	Method of manufacture of an ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	MJ63	Ink jet printhead nozzle array
TBA	MJ58	Nozzle guard for an ink jet printhead

Known ink jet printers are only capable of printing dots in a bi-level fashion whereas known image capture devices (cameras) capture images in continuous tones. It is known in the prior art to transform the continuous tone captured images to bi-level images for printing. The known techniques are processing intensive. A more efficient processing method is required for a compact printer system.

SUMMARY OF THE INVENTION

In one form, the invention resides in a method of generating a staggered dither cell for an image to be printed, said method comprising the steps of: writing color component values corresponding to even pixels in first entry locations in said dither cell; writing color component values corresponding to odd pixels in second entry locations in said dither cell; and mapping said dither cell to a staggered dither cell such that lines of said even pixel values are staggered relative to lines of said odd pixel values.

Further features of the invention will be evident from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to assist with describing preferred embodiments of the invention, reference will be made to the following figures in which:

- FIG 1 is a printer module;
- 5 FIG 2 is a camera module;
- FIG 3 is a memory module;
- FIG 4 is a communication module;
- FIG 5 is a flash module;
- FIG 6 is a timer module;
- 10 FIG 7 is a laser module;
- FIG 8 is an effects module;
- FIG 9 is a characters module;
- FIG 10 is an adaptor module;
- FIG 11 is a pen module;
- 15 FIG 12 is a dispenser module;
- FIG 13 is a first compact printer configuration;
- FIG 14 is a second compact printer configuration;
- FIG 15 is a third compact printer configuration;
- FIG 16 is a fourth compact printer configuration;
- 20 FIG 17 illustrates half-toning using a 50 x 50 dither cell;
- FIG 18 shows an Up-interpolate, Halftone and Reformat-for-Printer process; and
- FIG 19 is shows mapping a Standard Dither Cell to a Staggered Pixel Dither Cell.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Referring to FIGs 1 to 12, there are shown various modules that together form a compact printer system. Individual modules can be attached and detached from the compact printer configuration to allow a user-definable solution to business-card sized printing. Images can also be transferred from one compact printer to another without the use of a secondary computer system. Modules have a minimal user-interface to

30 allow straightforward interaction.

A compact printer system configuration consists of a number of compact printer modules connected together. Each compact printer module has a function that contributes to the overall functionality of the particular compact printer configuration. Each compact printer module is typically shaped like part of a pen, physically

connecting with other compact printer modules to form the complete pen-shaped device. The length of the compact printer device depends on the number and type of compact printer modules connected. The functionality of a compact printer configuration depends on the compact printer modules in the given configuration.

5 The compact printer modules connect both physically and logically. The physical connection allows modules to be connected in any order, and the logical connection is taken care of by the compact printer Serial Bus - a bus that provides power, allows the modules to self configure and provides for the transfer of data.

10 In terms of physical connection, most compact printer modules consist of a central body, a male connector at one end, and a female connector at the other. Since most modules have both a male and female connector, the modules can typically be connected in any order. Certain modules only have a male or a female connector, but this is determined by the function of the module. Adaptor modules allow these single-connector modules to be connected at either end of a given compact printer configuration.

15 A four wire physical connection between all the compact printer modules provides the logical connection between them in the form of the compact printer Serial Bus. The compact printer Serial Bus provides power to each module, and provides the means by which data is transferred between modules. Importantly, the compact printer Serial Bus and accompanying protocol provides the means by which the compact printer system auto-configures, reducing the user-interface burden on the end-user.

Compact printer modules can be grouped into three types:

- 25 • image processing modules including a Printer Module (FIG 1), a Camera Module (FIG 2), and a Memory Module (FIG 3). Image processing modules are primarily what sets the compact printer system apart from other pen-like devices. Image processing modules capture, print, store or manipulate photographic images;
- 30 • housekeeping modules including an Adapter Module (FIG 10), an Effects Module (FIG 8), a Communications Module (FIG 4), and a Timer Module (FIG 6). Housekeeping modules provide services to other modules or extended functionality to other modules; and
- isolated modules including a Pen Module (FIG 11) and a Laser Module (FIG 7). Isolated modules are those that attach to the compact printer system but are completely independent of any other module. They do not necessarily require

power, and may even provide their own power. Isolated Modules are defined because the functionality they provide is typically incorporated into other pen-like devices.

Although housekeeping modules and isolated modules are useful components in a compact printer system, they are extras in a system dedicated to image processing and photographic manipulation. Life size (1:1) illustrations of the compact printer modules are shown in FIGs 1 to 12, and example configurations produced by connecting various modules together are shown in FIGs 13 to 16.

FIG 1 shows a printer module that incorporates a compact printhead described in co-pending United States Patent Applications listed in the Background section of this application, incorporated herewith by reference, and referred to herewith as a Memjet printhead. The Memjet printhead is a drop-on-demand 1600 dpi inkjet printer that produces bi-level dots in up to 4 colors to produce a printed page of a particular width. Since the printhead prints dots at 1600 dpi, each dot is approximately $22.5\mu\text{m}$ in diameter, and spaced $15.875\mu\text{m}$ apart. Because the printing is bi-level, the input image should be dithered or error-diffused for best results. Typically a Memjet printhead for a particular application is page-width. This enables the printhead to be stationary and allows the paper to move past the printhead. A Memjet printhead is composed of a number of identical 1/2 inch Memjet segments.

The printer module 10 comprises a body 11 housing the Memjet printhead. Power is supplied by a three volt battery housed in battery compartment 12. The printhead is activated to commence printing when a business card (or similar sized printable media) is inserted into slot 13. Male connector 14 and female connector 15 facilitate connection of other modules to the printer module 10.

FIG 2 shows a camera module 20. The camera module provides a point-and-shoot camera component to the compact printer system as a means of capturing images. The camera module comprises a body 21 having a female connector 22. A lens 23 directs an image to an image sensor and specialized image processing chip within the camera 24. A conventional view finder 25 is provided as well as a lens cap 26. An image is captured when the Take button 27 is pushed. Captured images are transferred to the Printer Module 10 for subsequent printing, manipulation, or storage. The Camera Module also contains a self-timer mode similar to that found on regular cameras.

FIG 3 shows a Memory Module 30 comprising a body 31, LCD 32, IN button 33, OUT button 34 and SELECT button 35. The Memory Module 30 is a standard module used for storing photographic images captured by the Camera 20. The memory module stores 48 images, each of which can be accessed either at full resolution or at thumbnail resolution. Full resolution provides read and write access to individual images, and thumbnail resolution provides read access to 16 images at once in thumbnail form.

The Memory Module 30 attaches to other modules via a female connector 36 or male connector 37. The male and female connectors allow the module to be connected at either end of a configuration. Power is provided from the Printer Module 10 via the Serial Bus.

A Communications Module 40 is shown in FIG 4. The communications module 40 consists of a connector 41 and a cable 42 that terminates in an appropriate connector for a computer port, such as a USB port, RS232 serial port or parallel port. The Communications Module 40 allows the compact printer system to be connected to a computer. When so connected, images can be transferred between the computer and the various modules of the compact printer system. The communications module allows captured images to be downloaded to the computer, and new images for printing to be uploaded into the printer module 10.

A Flash Module 50 is shown in FIG 5. The Flash Module 50 is used to generate a flash with flash cell 51 when taking photographs with the Camera Module 20. The Flash Module attaches to other modules via female connector 52 and male connector 53. It contains its own power source. The Flash Module is automatically selected by the Camera Module when required. A simple switch allows the Flash Module to be explicitly turned off to maximize battery life.

FIG 6 shows a Timer Module 60 that is used to automate the taking of multiple photos with the Camera Module 20, each photo separated by a specific time interval. The captured photos are stored in Memory Module 30. Any flash requirements are handled by the Camera Module 20, and can therefore be ignored by the Timer Module. The Timer Module 60 consists of a body 61 housing a LCD 62, START/STOP button 63 and UNITS button 64. A SELECT button 65 allows the user to select time units and the number of units are set by UNITS button 64. The Timer Module 60 includes a male connector 66 and female connector 67. The Timer Module takes its power from the Printer Module 10 via the Serial Bus.

A Laser Module 70 is shown in FIG 7. The Laser Module 70 consists of a body 71 containing a conventional laser pointer operated by button 72. As the Laser Module is a terminal module it only has one connector, which in the example is a male connector 73. The Laser Module is an isolated module, in that it does not perform any image capture, storage, or processing. It exists as a functional addition to the compact printer system. It is provided because laser pointer services are typically incorporated into other pen-like devices. The Laser Module contains its own power supply and does not appear as a device on the Serial Bus.

The Effects Module shown in FIG 8 is an image processing module. It allows a user to select a number of effects and applies them to the current image stored in the Printer Module 10. The effects include borders, clip-art, captions, warps, color changes, and painting styles. The Effects Module comprises a body 81 housing custom electronics and a LCD 82. A CHOOSE button 83 allows a user to choose between a number of different types of effects. A SELECT button 84 allows the user to select one effect from the number of effects of the chosen type. Pressing the APPLY button 85 applies the effect to image stored in the Printer Module 10. The Effects Module obtains power from the Serial Bus. Male connector 86 and female connector 87 allow the Effects Module to be connected to other compact printer system modules.

FIG 9 shows a Character Module 90 that is a special type of Effects Module (described above) that only contains character clip-art effects of a given topic or genre. Examples include The Simpsons®, Star Wars®, Batman®, and Dilbert® as well as company specific modules for McDonalds® etc. As such it is an image processing module. It consists of a body 91 housing custom electronics and a LCD 92. SELECT button 93 allows the user to choose the effect that is to be applied with APPLY button 94. The Character Module obtains power from the Serial Bus through male connector 95 and female connector 96.

The Adaptor Module 100, shown in FIG 10, is a female/female connector that allows connection between two modules that terminate in male connectors. A male/male connector (not shown) allows connection between two modules that terminate in female connectors. The Adaptor Module is a housekeeping module, in that it facilitates the use of other modules, and does not perform any specific processing of its own.

All “through” modules have a male connector at one end, and a female connector at the other end. The modules can therefore be chained together, with each module connected at either end of the chain. However some modules, such as the Laser Module 70, are terminating modules, and therefore have either a male or female connector only. Such single-connector modules can only be connected at one end of the chain. If two such modules are to be connected at the one time, an Adaptor Module 100 is required.

FIG 11 shows a Pen Module 110 which is a pen in a module form. It is an isolated module in that it attaches to the compact printer system but is completely independent of any other module. It does not consume or require any power. The Pen Module is defined because it is a convenient extension of a pen shaped, pen sized device. It may also come with a cap 111. The cap may be used to keep terminating connectors clean in the case where the chain ends with a connector rather than a terminating module.

To assist with accurately feeding a business card sized print media into slot 13 of the printer module 10, a dispenser module 120 is provided as shown in FIG12. The dispenser module 120 comprises a body 121 that holds a store of business card sized print media. A Printer Module 10 locates into socket 122 on the dispenser module 120. When correctly aligned, a card dispensed from the dispenser module by slider 123 enters slot 13 and is printed.

In the sense that a minimum configuration compact printer system must be able to print out photos, a minimum compact printer configuration contains at least a Printer Module 10. The Printer Module holds a single photographic image that can be printed out via its Memjet printer. It also contains the 3V battery required to power the compact printer system.

In this minimum configuration, the user is only able to print out photos. Each time a user inserts a business card 130 into the slot in the Printer Module, the image in the Printer Module is printed onto the card. The same image is printed each time a business card is inserted into the printer. In this minimum configuration there is no way for a user to change the image that is printed. The dispenser module 120 can be used to feed cards 130 into the Printer Module with a minimum of fuss, as shown in FIG 13.

By connecting a Camera Module 20 to the minimum configuration compact printer system the user now has an instant printing digital camera in a pen, as shown

in FIG 14. The Camera Module 20 provides the mechanism for capturing images and the Printer Module 10 provides the mechanism for printing them out. The battery in the Printer Module provides power for both the camera and the printer.

5 When the user presses the “Take” button 27 on the Camera Module 20, the image is captured by the camera 24 and transferred to the Printer Module 10. Each time a business card is inserted into the printer the captured image is printed out. If the user presses “Take” on the Camera Module again, the old image in the Printer Module is replaced by the new image.

10 If the Camera Module is subsequently detached from the compact printer system, the captured image remains in the Printer Module, and can be printed out as many times as desired. The Camera Module is simply there to capture images to be placed in the Printer Module.

15 FIG 15 shows a further configuration in which a Memory Module 30 is connected to the configuration of FIG 14. In the embodiment of FIG 15, the user has the ability to transfer images between the Printer Module 10 and a storage area contained in the Memory Module 30. The user selects the image number on the Memory Module, and then either sends that image to the Printer Module (replacing whatever image was already stored there), or brings the current image from the Printer Module to the specified image number in the Memory Module. The Memory Module
20 also provides a way of sending sets of thumbnail images to the Printer Module.

Multiple Memory Modules can be included in a given system, extending the number of images that can be stored. A given Memory Module can be disconnected from one compact printer system and connected to another for subsequent image printing.

25 With the Camera Module 20 attached to a Memory Module/Printer Module compact printer system, as shown in FIG 15, the user can “Take” an image with the Camera Module, then transfer it to the specified image number in the Memory Module. The captured images can then be printed out in any order.

30 By connecting a Communications Module 40 to the minimum configuration compact printer system, the user gains the ability to transfer images between a PC and the compact printer system. FIG 16 shows the configuration of FIG 15 with the addition of a Communications Module 40. The Communications Module makes the Printer Module 10 and any Memory Modules 30 visible to an external computer system. This allows the download or uploading of images. The communications

module also allows computer control of any connected compact printer modules, such as the Camera Module 20.

In the general case, the Printer Module holds the “current” image, and the other modules function with respect to this central repository of the current image.

5 The Printer Module is therefore the central location for image interchange in the compact printer system, and the Printer Module provides a service to other modules as specified by user interaction.

A given module may act as an image source. It therefore has the ability to transfer an image to the Printer Module. A different module may act as an image store. It therefore has the ability to read the image from the Printer Module. Some
10 modules act as both image store and image source. These modules can both read images from and write images to the Printer Module’s current image.

The standard image type has a single conceptual definition. The image definition is derived from the physical attributes of the printhead used in the Printer
15 Module. The printhead is 2 inches wide and prints at 1600dpi in cyan, magenta and yellow bi-level dots. Consequently a printed image from the compact printer system is 3200 bi-level dots wide.

The compact printer system prints on business card sized pages (85mm x 55mm). Since the printhead is 2 inches wide, the business cards are printed such that
20 1 line of dots is 2 inches. 2 inches is 50.8mm, leaving a 2mm edge on a standard business-card sized page. The length of the image is derived from the same card size with a 2mm edge. Consequently the printed image length is 81mm, which equals 5100 1600dpi dots. The printed area of a page is therefore 81mm x 51mm, or 5100 x 3200 dots.

25 To obtain an integral contone to bi-level ratio a contone resolution of 267 ppi (pixels per inch) is chosen. This yields a contone CMY page size of 850 x 534, and a contone to bi-level ratio of 1:6 in each dimension. This ratio of 1:6 provides no perceived loss of quality since the output image is bi-level.

The printhead prints dots in cyan, magenta, and yellow ink. The final output to
30 the printed page must therefore be in the gamut of the printhead and take the attributes of the inks into account. It would at first seem reasonable to use the CMY color space to represent images. However, the printer’s CMY color space does not have a linear response. This is definitely true of pigmented inks, and partially true for dye-based inks. The individual color profile of a particular device (input and output) can vary

considerably. Image capture devices (such as digital cameras) typically work in RGB (red green blue) color space, and each sensor will have its own color response characteristics.

Consequently, to allow for accurate conversion, as well as to allow for future image sensors, inks, and printers, the CIE $L^*a^*b^*$ color model [CIE, 1986, CIE 15.2 Colorimetry: Technical Report (2nd Edition), Commission Internationale De l'Eclairage] is used for the compact printer system. $L^*a^*b^*$ is well defined, perceptually linear, and is a superset of other traditional color spaces (such as CMY, RGB, and HSV).

The Printer Module must therefore be capable of converting $L^*a^*b^*$ images to the particular peculiarities of its CMY color space. However, since the compact printer system allows for connectivity to PCs, it is quite reasonable to also allow highly accurate color matching between screen and printer to be performed on the PC. However the printer driver or PC program must output $L^*a^*b^*$.

Each pixel of a compact printer image is therefore represented by 24 bits: 8 bits each of L^* , a^* , and b^* . The total image size is therefore 1,361,700 bytes (850 x 534 x 3).

Each image processing module is able to access the image stored in the Printer Module. The access is either to read the image from the Printer Module, or to write a new image to the Printer Module.

The communications protocol for image access to the Printer Module provides a choice of internal image organization. Images can be accessed either as 850 x 534 or as 534 x 850. They can also be accessed in interleaved or planar format. When accessed as interleaved, each pixel in the image is read or written as 24 bits: 8 bits each of L^* , a^* , b^* . When accessed as planar, each of the color planes can be read or written independently. The entire image of L^* pixels, a^* pixels or b^* pixels can be read or written at a time.

The Memjet printhead in the Printer module 10 is only capable of printing dots in a bi-level fashion. The stored contone CMY image must therefore be converted to a dithered CMY image. More specifically, a dispersed dot ordered dither is produced using a stochastic dither cell, converting a contone CMY image into a dithered bi-level CMY image.

The 8-bit 1600 dpi contone value is compared to the current position in the dither cell. If the 8-bit contone value is greater than the dither cell value, an output bit

of 1 is generated. Otherwise an output bit of 0 is generated. This output bit will eventually be sent to the printhead and control a single nozzle to produce a single C, M, or Y dot. The bit represents whether or not a particular nozzle will fire for a given color and position. This Half-toning process can be seen in FIG 17.

5 The same position in the dither cell can be used for C, M, and Y. This is because the actual printhead produces the C, M, and Y dots for different lines of the image to be printed in the same print cycle. In the present invention, the staggering of the different colored dots effectively produces staggering in the dither cell.

10 The size of the dither cell depends on the resolution of the output dots. Since we are producing 1600 dpi dots, the cell size should be larger than 32 x 32. In addition, to allow the dot processing order to match the printhead segments, the size of the dither cell should ideally divide evenly into 800 (since there are 800 dots printed on one line by each segment of the printhead).

15 A dither cell size of 50 x 50 is large enough to produce high quality results, and each dimension of the dither cell divides evenly into 800 (16 times). Each entry of the dither cell is 8 bits, for a total of 2500 bytes (approximately 2.5 KB). However, alternative dither cell sizes that produce high quality results are envisaged.

20 Since the CMY image size is 534 x 850 pixels and the final print resolution is 3200 x 5100 dots, the CMY image must be up-interpolated by a ratio of 1:6 in both dimensions. This is achieved by the process of pixel replication whereby a single pixel value is used for a larger area, in this case a 6 x 6 block. Since the pixels are to be dithered, the 36 resultant bi-level dots take on the contone value of the replicated pixel.

25 The Up-Interpolate and Halftone processes produce the dots in the correct order for printing. The bits representing the dots are then collected in groups of 12 and sent to the printhead. This is the Reformat for Printer process.

 Although the Up-Interpolate, Halftone, and Reformat For Printer tasks are defined as separate tasks, they are implemented as a single process in the hardware implementation of the central processor of the Printer Module 10.

30 The Up-Interpolate, Halftone and Reformat for Printer process is shown in FIG 18. The input to the Up-Interpolate, Halftone and Reformat Unit (UHRU) is the contone buffer (Buffer 2) containing the partial CMY image. The output is a set of 12-bit values in the correct order to be sent to the Memjet Interface (MJI) for subsequent

output to the printhead via Buffer 1. The 12 output bits are generated 1 bit at a time, and sent to the 12-bit shift register in Buffer 1.

The control of this process is via an Advance signal from the MJI and a LineSync0 pulse from a LineSync Generator Unit (LSGU). When the UHRU starts up, and after each LineSync0 pulse, 12 bits are produced, and are clocked into the 12-bit shift register of Buffer 1. After the 12th bit has been clocked in, a TransferWriteEnable pulse is sent to Buffer 1 and the next 12 bits are generated. The UHRU then waits for the Advance pulse from the MJI. When the Advance pulse arrives, the TransferWriteEnable pulse is sent to Buffer 1, and the next 12 bits are calculated before waiting again. In practice, once the first Advance pulse is provided, synchronization has occurred and future Advance pulses will occur every 12 cycles thereafter.

As shown in FIG 18, the Halftone task is undertaken by a simple 8-bit Unsigned Comparator. The two inputs to the comparator come from the Staggered Dither Cell and Buffer 2. The order that these values are presented to the Unsigned Comparator is determined by an Address Generator State Machine, which ensures that the addresses into the CMY image stored in Buffer 2 match the segment-oriented order required for the printhead. The Address Generator State Machine therefore undertakes the Up-Interpolation and Reformatting for Printer tasks. Rather than simply access an entire line at a time at high resolution, and then reformat the line according to the printer lookup requirements, the reformatting is achieved by the appropriate addressing of the CMY contone buffer (Buffer 2), and by ensuring that the comparator uses the correct lookup from the dither cell to match the staggered addresses.

The Half-toning task is as described above. The 50 x 50 Staggered Dither Cell ensures that a given position in the Staggered Dither Cell for one segment will be the same for the remaining 3 segments. The same position in the Dither Cell can be used for different colors due to the fact that dots on different lines of the final image are being generated at the same time for each of the colors.

The addressing for the Dither Cell is therefore quite simple. Starting at a particular row in the Staggered Dither Cell (e.g. row 0), the first Dither Cell entry used is Entry 0. This entry is used 12 times (12 cycles) to generate the 3 colors for all 4 segments. The entry is then advanced to Entry 1 of row 0. After Entry 49, we revert back to Entry 0 of row 0. This continues for all 9,600 cycles in order to generate all

9,600 dots. The Halftone Unit then stops and waits for the LineSync0 pulse that causes the address generator to advance to the next row in the Dither Cell.

The Staggered Dither Cell is so called because it differs from a regular dither cell by having the odd and even lines staggered. This is because the odd and even pixels (starting from pixel 0) are generated on different lines. This saves the Address Generator from having to advance to the next row and back again on alternate sets of 12 pixels, thus reducing the circuitry required. FIG 19 shows a simple dither cell, and how to map it to a staggered dither cell of the same size. Note that, for determining the “oddness” of a given position, we number the pixels in a given row 0, 1, 2 etc.

The 8-bit value from Buffer 2 is compared (unsigned) to the 8-bit value from the Staggered Dither Cell. If the Buffer 2 pixel value is greater than or equal to the Dither Cell value, a “1” bit is output to the shift register of Buffer 1. Otherwise a “0” bit is output to the shift register of Buffer 1.

In order to halftone 9,600 contone pixels, 9,600 contone pixels must be read in. The Address Generator Unit performs this task, generating the addresses into Buffer 2, effectively implementing the UpInterpolate task. The address generation for reading Buffer 2 is slightly more complicated than the address generation for the Dither Cell, but not overly so.

The Address Generator for reading Buffer 2 only begins once the first row of Buffer 2 has been written. The remaining rows of Buffer 2 are 0, the reading of which would result in no printed dots.

Each of the 6 effective output lines has a register with an integer and fractional component. The integer portion of the register is used to select which Buffer line will be read to effectively up-interpolate the color for that particular color’s odd and even pixels. 3 pixel counters are used to maintain the current position within segment 0, and a single temporary counter P_ADR (pixel address) is used to offset into the remaining 3 segments.

In summary, address generation for reading Buffer 2 requires the following registers, as shown in Table 1.

Table 1. Registers Required for Reading Buffer 2	
Register Name	Size
CyanEven	6 bits (3:3)

CyanOdd	6 bits (3:3)
MagentaEven	6 bits (3:3)
MagentaOdd	6 bits (3:3)
YellowEven	6 bits (3:3)
YellowOdd	6 bits (3:3)
Cyan_P_ADR	13 bits (10:3)
Magenta_P_ADR	13 bits (10:3)
Yellow_P_ADR	13 bits (10:3)
P_ADR	13 bits (100:3)

5 The initial values for the 6 buffer line registers is the physical dot distance between nozzles (remember that the fractional component is effectively a divide by 6). For example, if the odd and even output dots of a color are separated by a distance of 1 dot, and nozzles of one color are separated from the nozzles of the next by 8 dots, the initial values would be as shown in the First Line column in Table 2. Once each set of 9,600 dots has been generated, each of these counters must increment by 1 fractional component, representing the fact that we are sampling each pixel 6 times in the vertical dimension. The resultant values will then be as shown in the Second Line column in Table 2. Note that 5:5 + 1 = 0:0 since there are only 6 buffer lines.

Table 2. Example Initial Setup and Second Line Values for the 6 Buffer Line Registers					
Name	Calculation	First Line		Second Line	
		Value	Buff	Value	Buff
CyanEven	Initial Position	0:0	0	0:1	0
CyanOdd	CyanEven+0:1	0:1	0	0:2	0
MagentaEven	CyanOdd+1:2 (8)	1:3	1	1:4	1
MagentaOdd	MagentaEven+0:1	1:4	1	1:5	1
YellowEven	MagentaOdd+1:2 (8)	3:0	2	3:1	3
YellowOdd	YellowEven+0:1	3:1	3	3:2	3

15 The 6 buffer line registers determine which of the buffer lines is to be read for a given color's odd or even pixels. To determine which of the contone pixels are read from the specific line of Buffer 2, we use 3 Pixel Address counters, one for each

color, and a single temporary counter (P_ADR) which is used to index into each of the 4 segments. Each segment is separated from the next by 800 dots. In contone pixels this distance is 133:2 (800/6). We generate the 4 addresses for the even cyan pixels, then the 4 addresses for the even magenta, and finally the 4 addresses for the even yellow. We then do the same for the odd cyan, magenta, and yellow pixels. This process of two sets of 12 bits - 12 even then 12 odd, is performed 400 times. We can then reset the Pixel Address counters (X_P_ADR) to 0 and advance the 6 buffer line registers. Every 6 line advances, the next buffer line is now free and ready for updating (by the Convert to CMY process). Table 3 lists the steps in a simple form.

10

Table 3. Address Generation for Reading Buffer 2			
#	Address	Calculation	Comment
0		P_ADR = Cyan_P_ADR Cyan_P_ADR += 0:1	Generate address for even pixel in Cyan segment 0 and advance to next pixel for cyan
1	CyanEven:P_ADR	P_ADR += 133:2	Advance to segment 1 (cyan)
2	CyanEven:P_ADR	P_ADR += 133:2	Advance to segment 2 (cyan)
3	CyanEven:P_ADR	P_ADR += 133:2	Advance to segment 3 (cyan)
4	CyanEven:P_ADR	P_ADR = Magenta_P_ADR Magenta_P_ADR += 0:1	Generate address for even pixel in Magenta segment 0 and advance to next pixel for magenta
5	MagentaEven:P_ADR	P_ADR += 133:2	Advance to segment 1 (magenta)
6	MagentaEven:P_ADR	P_ADR += 133:	Advance to segment 2 (magenta)
7	MagentaEven:P_ADR	P_ADR += 133:2	Advance to segment 3 (magenta)
8	MagentaEven:P_ADR	P_ADR = Yellow_P_ADR Yellow_P_ADR += 0:1	Generate address for even pixel in Yellow segment 0 and advance to next pixel for yellow
9	YellowEven:P_ADR	P_ADR += 133:2	Advance to segment 1 (yellow)

10	YellowEven:P_ADR	P_ADR += 133:2	Advance to segment 2 (yellow)
11	YellowEven:P_ADR	P_ADR += 133:2	Advance to segment 3 (yellow)
12	YellowEven:P_ADR	P_ADR = Cyan_P_ADR Cyan_P_ADR += 0:1	Generate address for odd pixel in Cyan segment 0 and advance to next pixel for cyan
13	CyanOdd:P_ADR	P_ADR += 133:2	Advance to segment 1 (cyan)
etc			

Throughout the specification the aim has been to describe the preferred embodiments of the invention without limiting the invention to any one embodiment or specific collection of features. Persons skilled in the relevant art may realize variations from the specific embodiments that will nonetheless fall within the scope of the invention.

5

CLAIMS

1. A method of generating a staggered dither cell for an image to be printed, said method comprising the steps of:
 - 5 writing color component values corresponding to even pixels in first entry locations in said dither cell;
 - writing color component values corresponding to odd pixels in second entry locations in said dither cell; and
 - 10 mapping said dither cell to a staggered dither cell such that lines of said even pixel values are staggered relative to lines of said odd pixel values.
2. The method of claim 1 wherein said writing step further includes writing said color component values in said first and second entry locations in a correct order for printing by a printhead.
3. The method of claim 1 wherein said writing step further includes writing a
15 number of color component values in one entry location, said number being determined by loading criteria of a printhead.
4. The method of claim 1 wherein said writing steps further comprise writing twelve color component values in each of said first and second entry locations.
5. A staggered dither cell for storing color component values of an image to be
20 printed, said dither cell comprising:
 - an $n \times n$ entry cell where n divides evenly into the number of dots printable by each segment of a printhead;
 - more than one color component value stored in each entry location of said cell; and
 - 25 lines of said values corresponding to odd pixels of said image in said cell staggered relative to lines of said values corresponding to even pixels of said image.
6. The staggered dither cell of claim 5 wherein $n=50$.
7. The staggered dither cell of claim 5 wherein twelve of said color component
30 values are stored in each entry location.
8. The dither cell of claim 7 wherein said twelve color components consist of three colors to be printed for four segments of a printhead.
9. A method of converting an image into a dithered, bi-level image for printing, comprising the steps of:




storing an up-interpolated version of said image in a first buffer;
storing color component values corresponding to odd and even pixels in a
dither cell;
staggering lines of said color component values corresponding to odd pixels
relative to lines of even pixel values;
comparing each pixel value in said first buffer with its corresponding value in
said staggered dither cell; and
outputting an instruction to print to a second buffer if said value from said first
buffer is greater than or equal to said staggered dither cell value.

- 10 10. The method of claim 9 wherein said storing of said up-interpolated image and
said storing of said color component values are controlled by means of an
address generator.

ABSTRACT

A method of, and apparatus for, dithering an image to be printed. Color component values of odd and even pixels of an image are stored in a dither cell. The dither cell is mapped to a staggered dither cell such that lines of odd pixel component values are staggered relative to lines of even pixel component values. Addressing of the staggered dither cell is determined by an address generator that also addresses a buffer storing an up-interpolated image. Corresponding values in the staggered dither cell and the buffer are compared to determine which nozzles of a printhead are fired.

PP16US

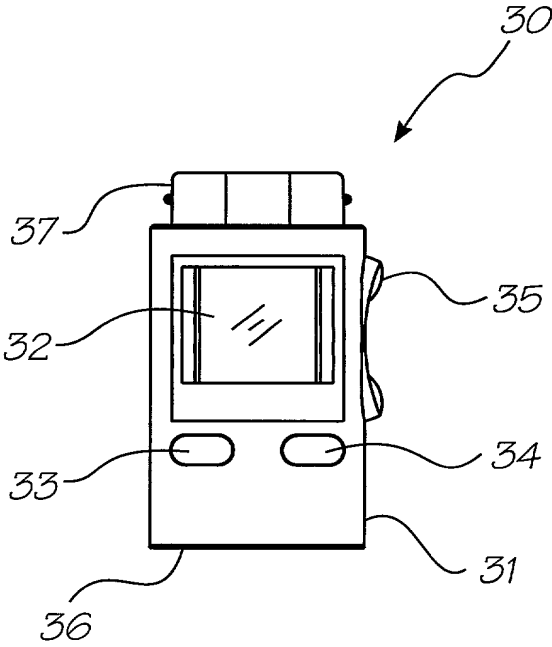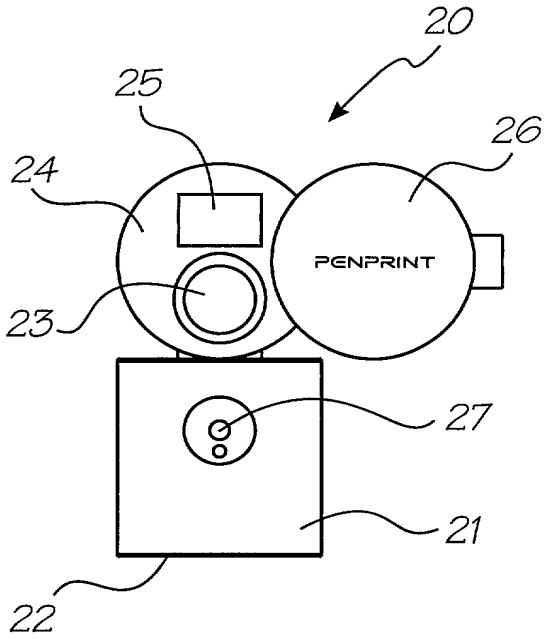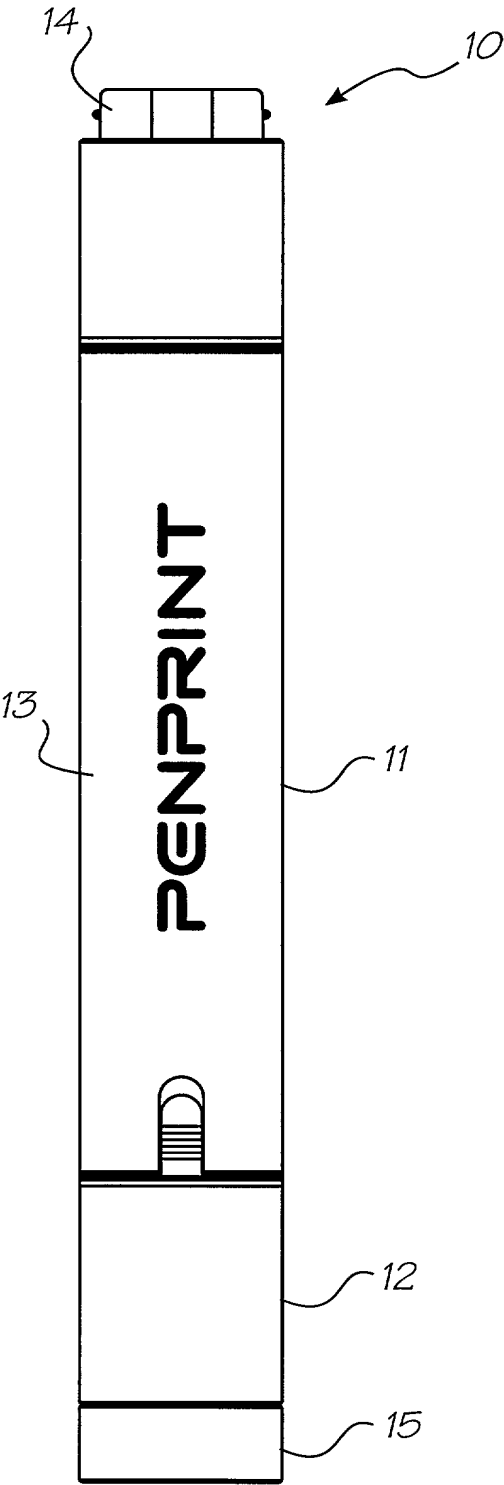

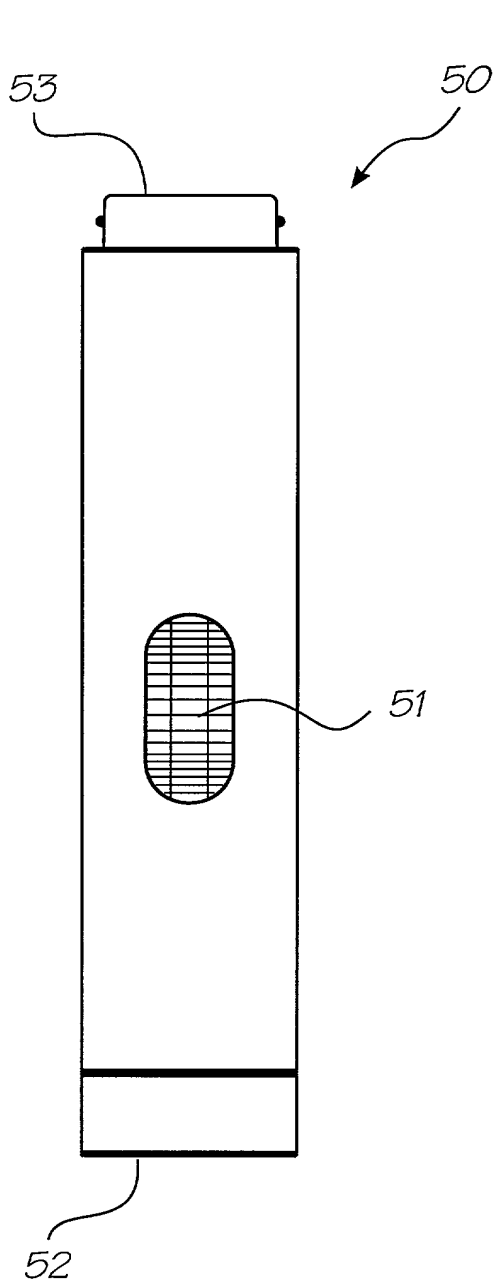


FIG. 5

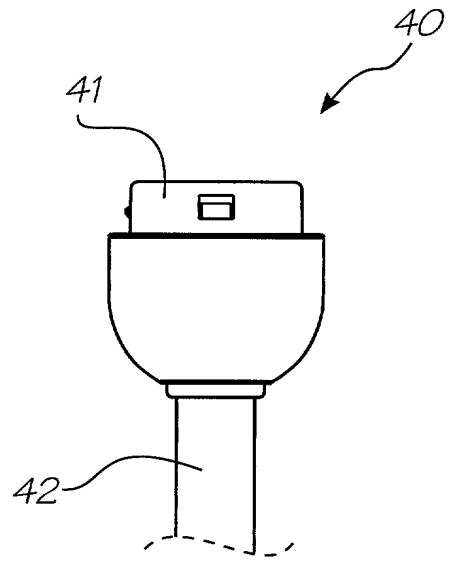


FIG. 4

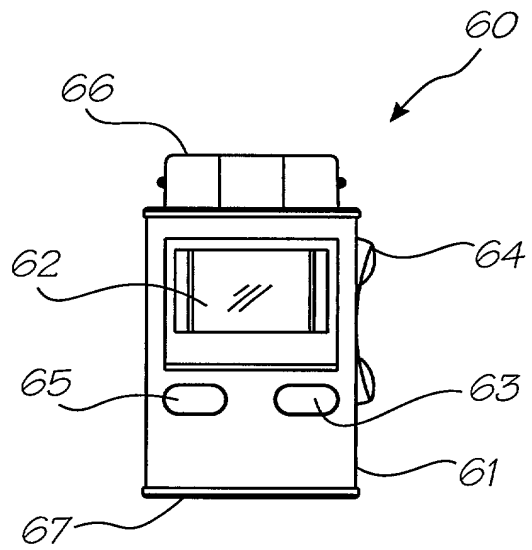


FIG. 6

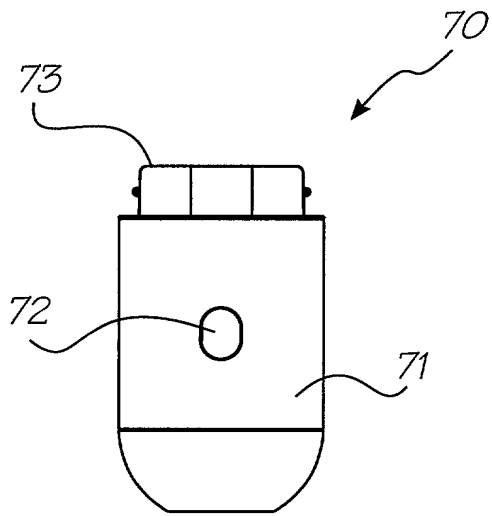


FIG. 7

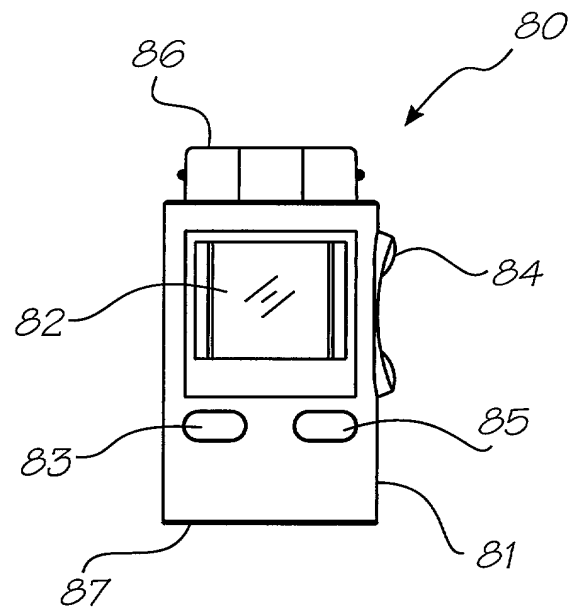


FIG. 8

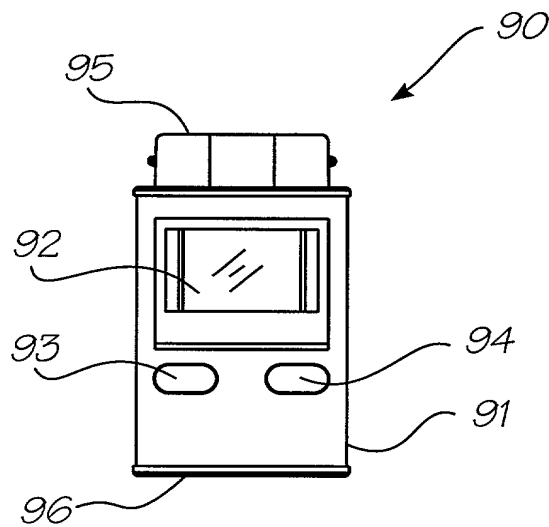


FIG. 9

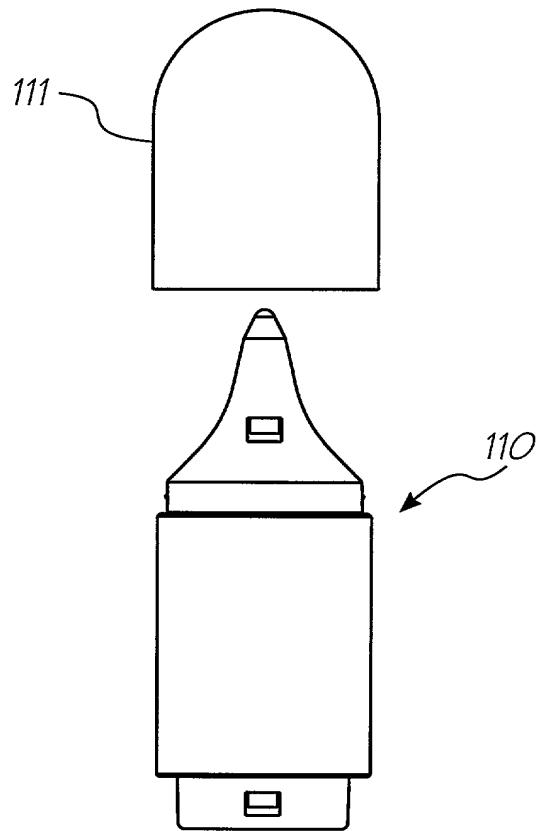


FIG. 11

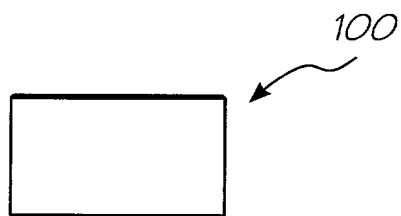


FIG. 10

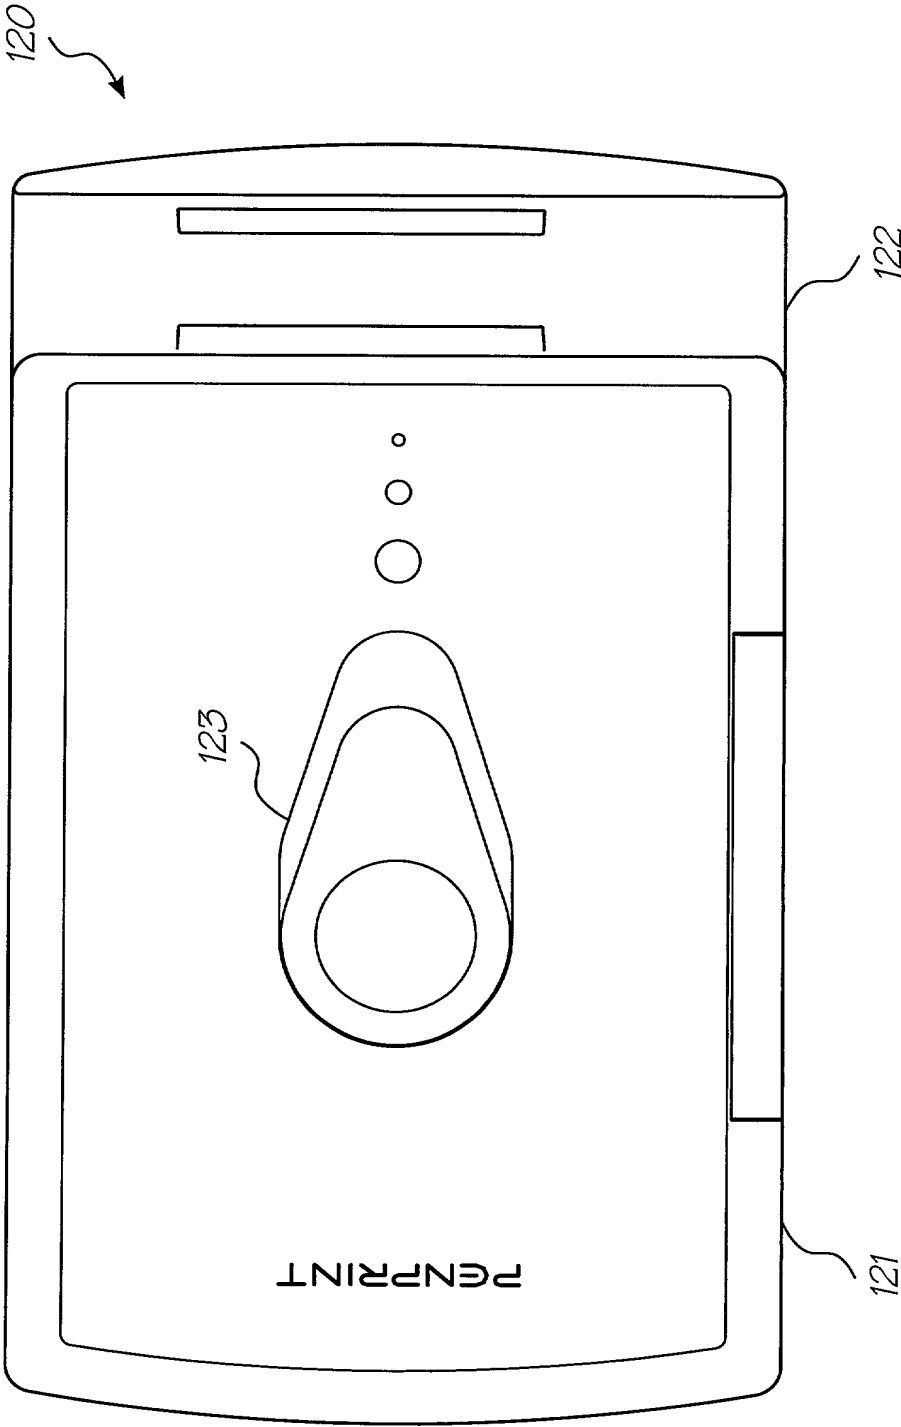


FIG. 12

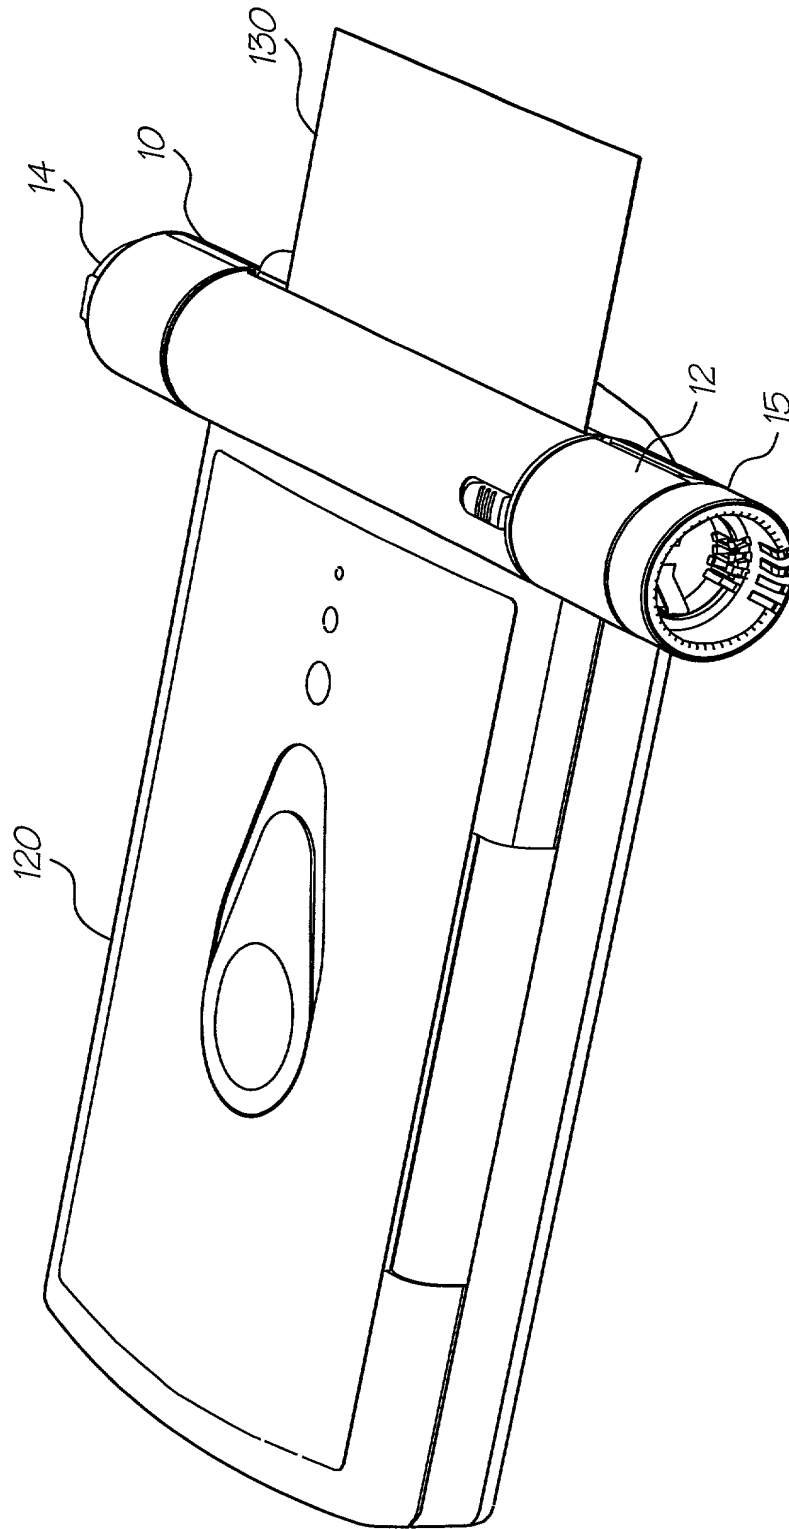


FIG. 13

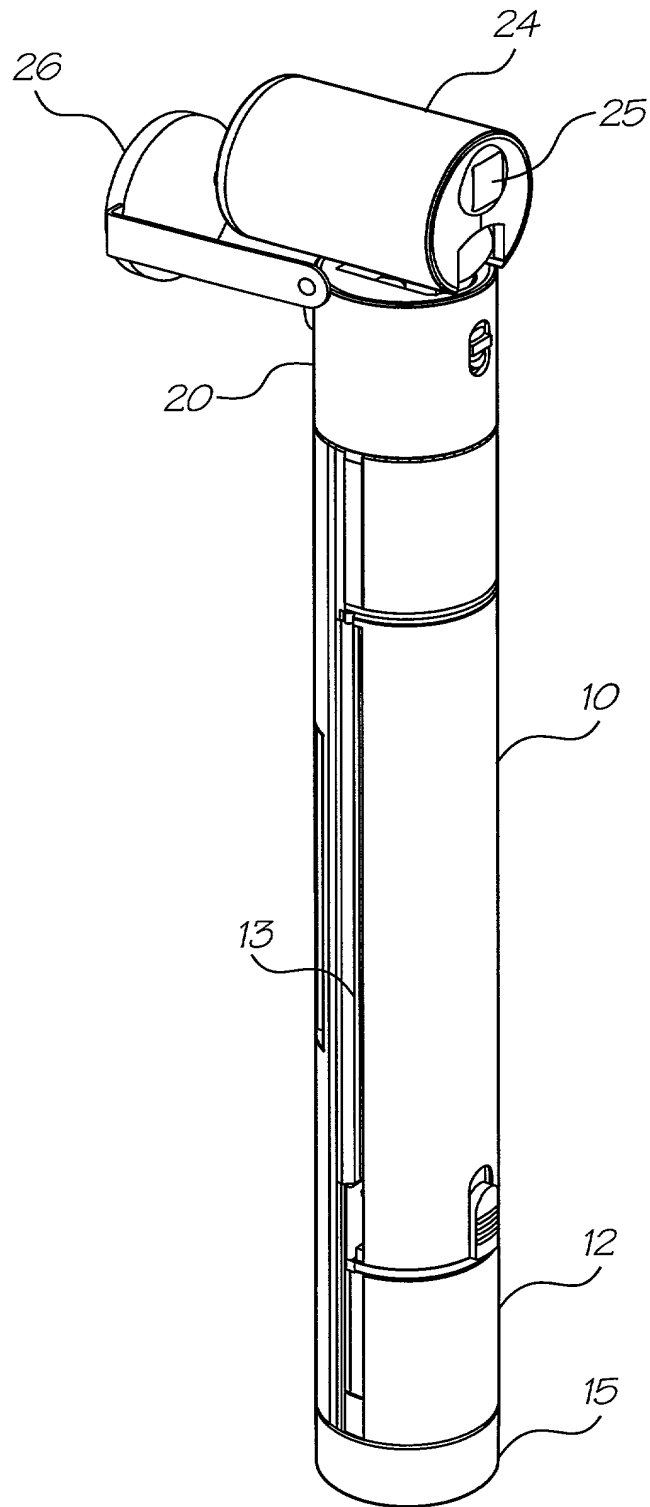


FIG. 14

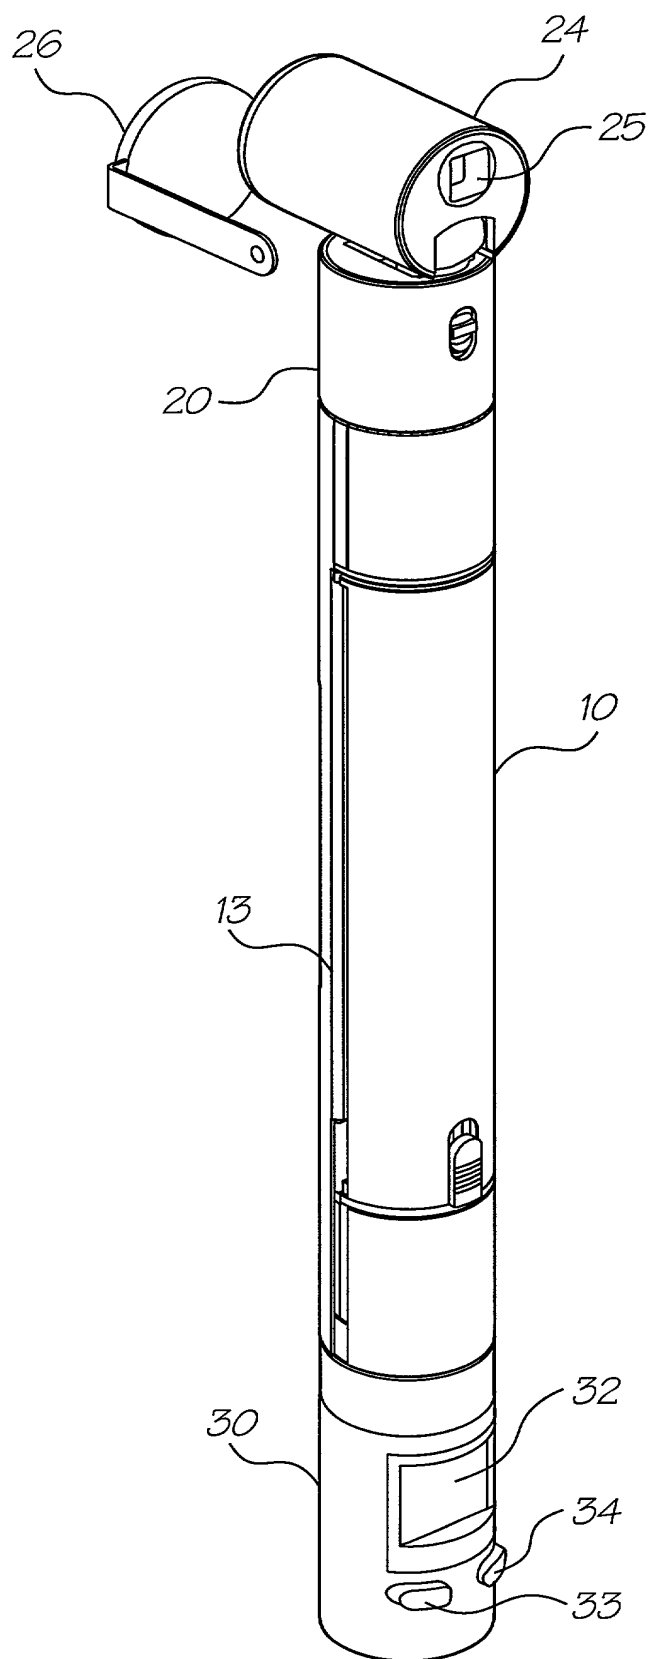


FIG. 15

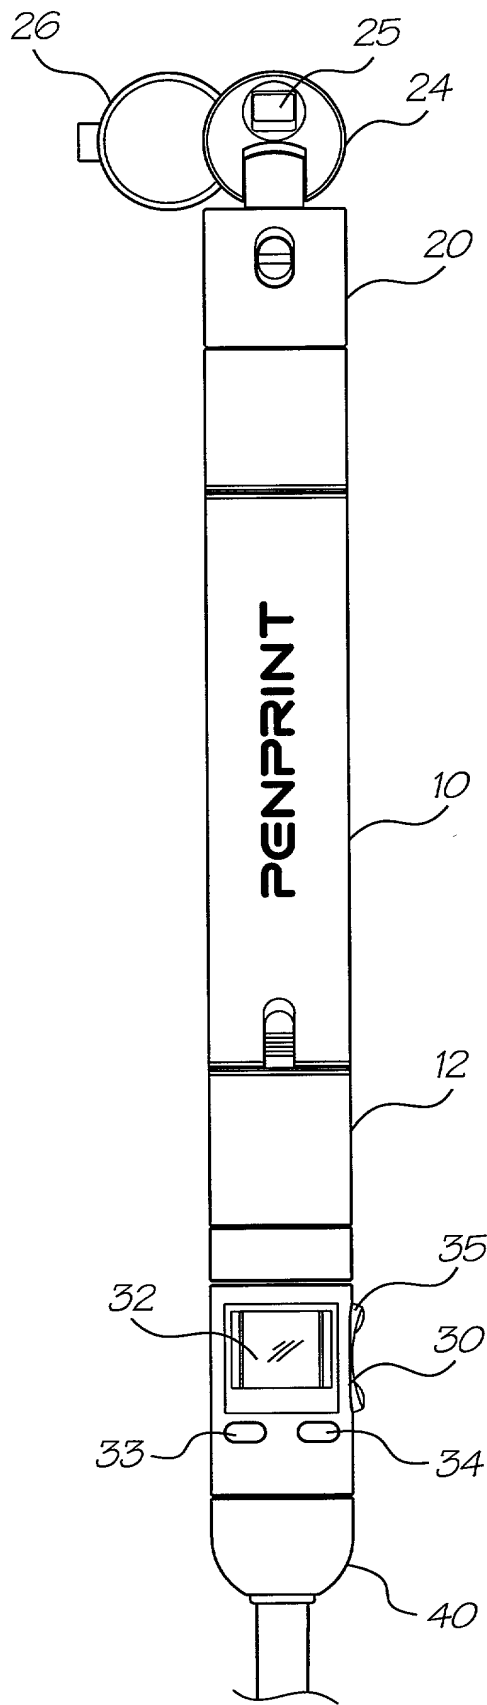


FIG. 16

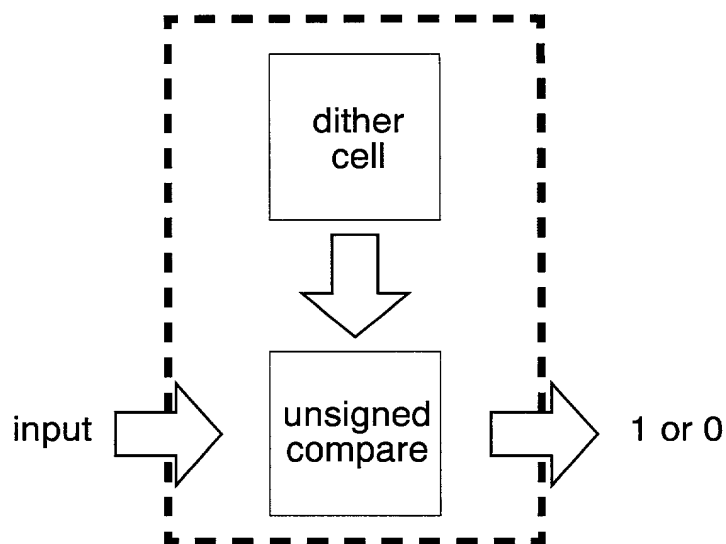


FIG. 17

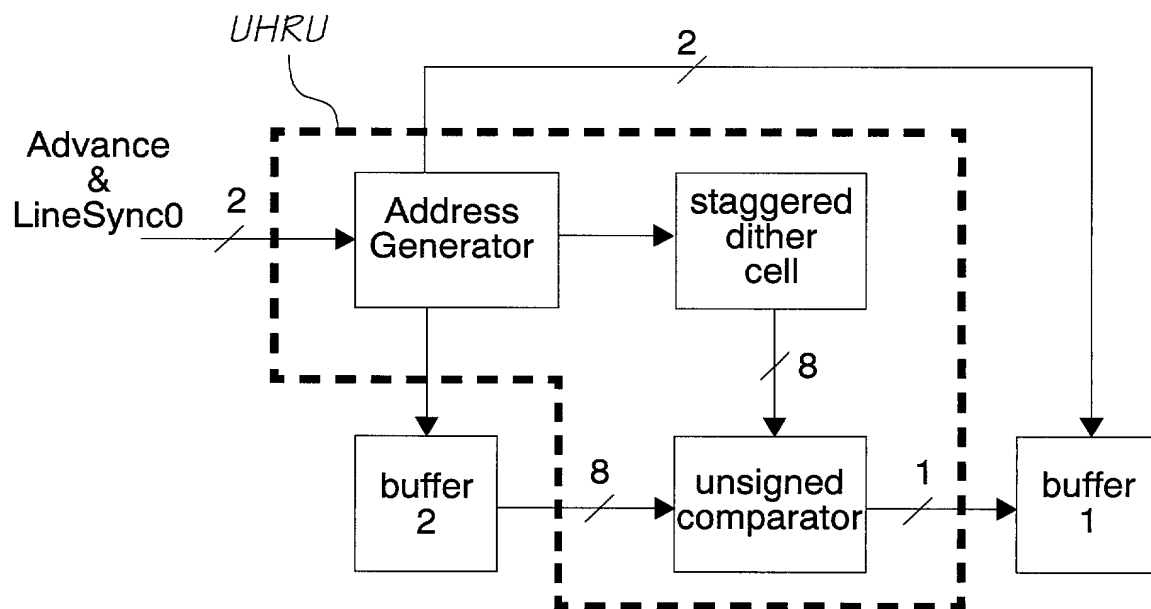


FIG. 18

FIG. 19 is a diagram illustrating a method for generating a staggered dither cell from an original dither cell. The original dither cell is a 4x4 grid of cells, each containing a letter. The staggered dither cell is a 4x4 grid of cells, each containing a letter. The staggered dither cell is generated by staggering the original dither cell by one row and one column.

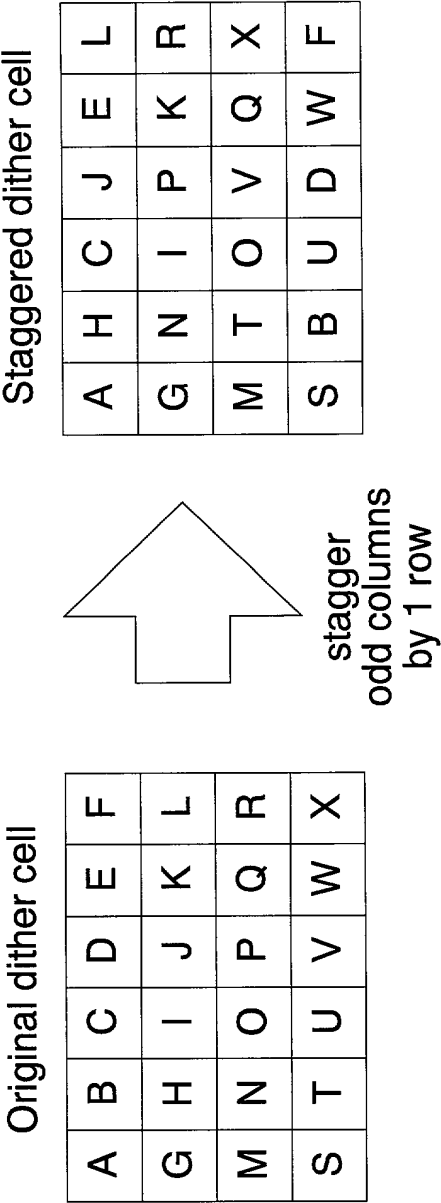


FIG. 19

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	PP16US
	First Named Inventor	Simon Robert Walmsley
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS OF DITHERING

the specification of which (Title of the Invention)
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PQ0560	Australia	05/25/1999	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
 Approved for use through 9/30/00. OMB 0651-0032
 Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number OR
☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label OR ☒ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Simon Robert		Walmsley	
Inventor's Signature	<i>Simon Walmsley</i>		Date
Residence: City	Epping	State	NSW
		Country	Australia
Post Office Address	Unit 3, 9 Pembroke Street		
Post Office Address			
City	Epping	State	NSW
		ZIP	2121
		Country	Australia

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto